


# PREMIUM BOXES



Scatole di derivazione Serie CD  
Pulsantiere Serie CP  
Accessori

*CD Series Push-button, terminal boxes  
CP Series Push button panels  
Accessories*

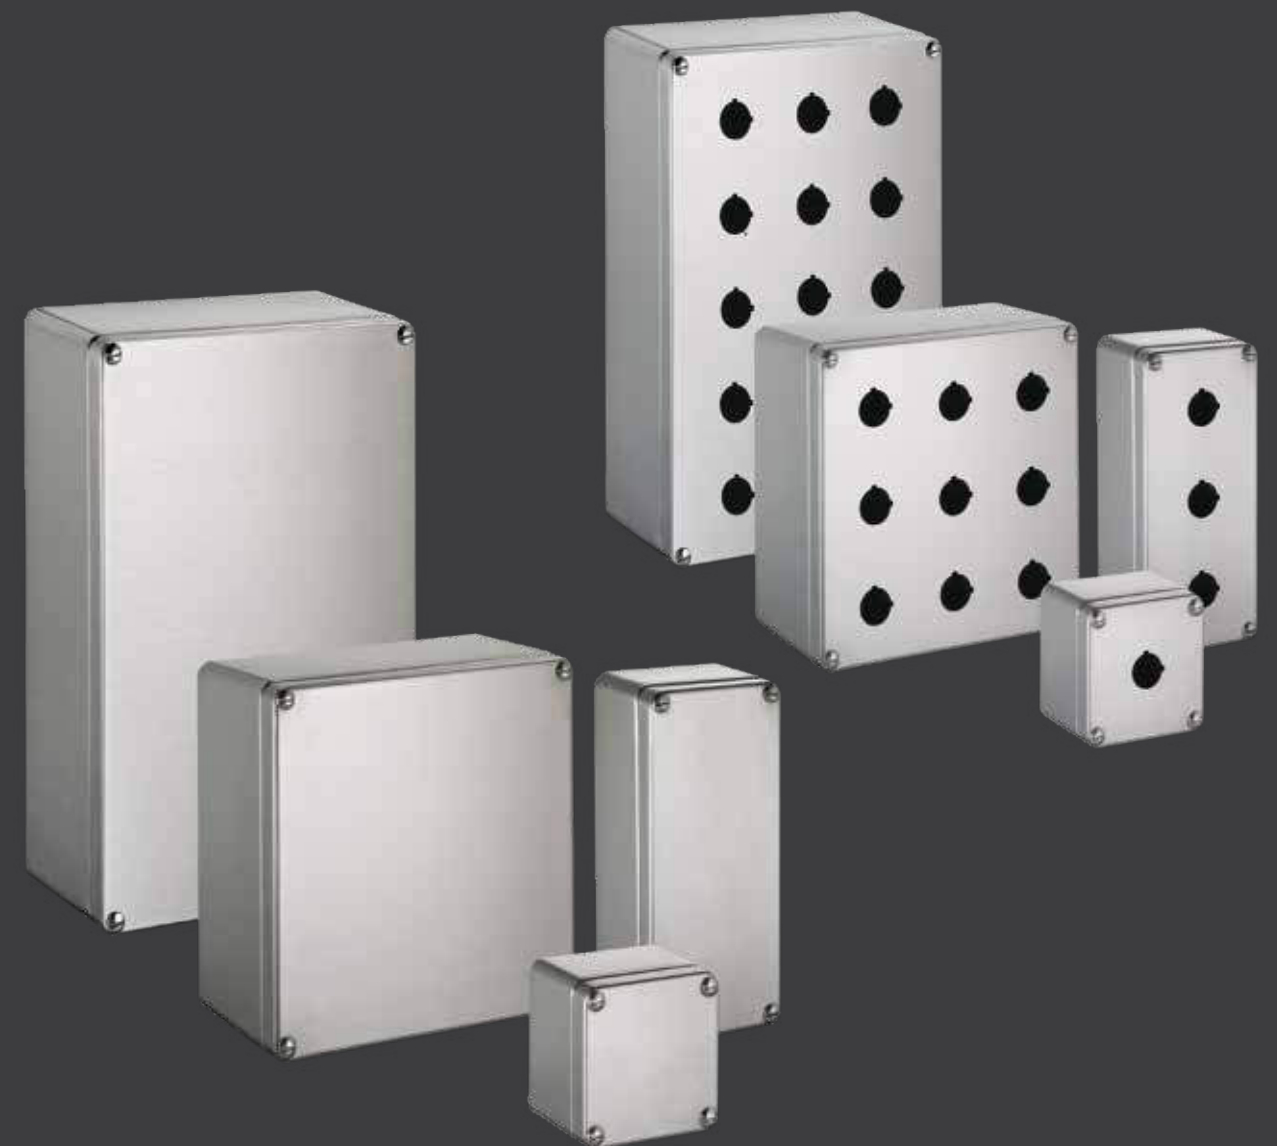

Scatole di derivazione  
Serie CD

Scatole di derivazione in acciaio inox AISI 304 EN 1.4301 finitura scotch brite spessore 1,2 mm, particolarmente idonee all’utilizzo in ambienti critici, atmosferici, di igiene, di corrosione e di tossicità. Guarnizioni siliconiche schiumate “Fermasil A-93-1-VP3-Grey” adatte a temperature da -50° C a +180° C. Angoli raggiati R8.

CD Series push-button  
and terminal boxes


Junction boxes, 1.2 mm thick, AISI 304 EN 1.4301 stainless steel with Scotch-Brite finish, particularly suitable for use in critical environments with special atmospheres, or where hygiene is important or there is exposure to corrosion or toxic elements. Provided with Fermasil A-93-1-VP3-Grey foamed silicone gaskets for temperatures from -50°C to +180°C, and R8 rounded corners.



| Codice scatola    | Codice pannello interno | Dimensioni esterne mm  |     |     | Peso netto Kg | Punti di chiusura | Punti fissaggio posteriore | Dimensione pannello interno mm |      | Utile foratura coperchio mm |      |
|-------------------|-------------------------|------------------------|-----|-----|---------------|-------------------|----------------------------|--------------------------------|------|-----------------------------|------|
|                   |                         | L                      | H   | P   |               |                   |                            | L-25                           | H-25 | L-25                        | H-25 |
| Terminal box cod. | Mounting plate cod.     | External dimensions mm |     |     | Net weight Kg | Closing points    | Rear fixing points         | Mounting plate dimensions mm   |      | Cover drill size mm         |      |
|                   |                         | L                      | H   | D   |               |                   |                            | L-25                           | H-25 | L-25                        | H-25 |
| CD090909A3A       | -                       | 90                     | 90  | 90  | 0,6           | 4                 | 2                          | -                              | -    | 65                          | 65   |
| CD091509A3A       | -                       | 90                     | 150 | 90  | 0,9           | 4                 | 2                          | -                              | -    | 65                          | 125  |
| CD092009A3A       | -                       | 90                     | 200 | 90  | 1             | 4                 | 2                          | -                              | -    | 65                          | 175  |
| CD093009A3A       | -                       | 90                     | 300 | 90  | 1,5           | 4                 | 2                          | -                              | -    | 65                          | 275  |
| CD151512A3A       | C1515ZNA                | 150                    | 150 | 120 | 1,7           | 4                 | 2                          | 125                            | 125  | 125                         | 125  |
| CD152012A3A       | C1520ZNA                | 150                    | 200 | 120 | 2,1           | 4                 | 2                          | 125                            | 175  | 125                         | 175  |
| CD153012A3A       | C1530ZNA                | 150                    | 300 | 120 | 3             | 4                 | 2                          | 125                            | 275  | 125                         | 275  |
| CD202012A3A       | C2020ZNA                | 200                    | 200 | 120 | 2,7           | 4                 | 4                          | 175                            | 175  | 175                         | 175  |
| CD203012A3A       | C2030ZNA                | 200                    | 300 | 120 | 3,8           | 4                 | 4                          | 175                            | 275  | 175                         | 275  |
| CD204012A3A       | C2040ZNA                | 200                    | 400 | 120 | 4,8           | 4                 | 4                          | 175                            | 375  | 175                         | 375  |
| CD303012A3A       | C3030ZNA                | 300                    | 300 | 120 | 5,2           | 4                 | 4                          | 275                            | 275  | 275                         | 275  |
| CD304015A3A       | C3040ZNA                | 300                    | 400 | 150 | 7,2           | 4                 | 4                          | 275                            | 375  | 275                         | 375  |
| CD404015A3A       | C4040ZNA                | 400                    | 400 | 150 | 9,2           | 4                 | 4                          | 375                            | 375  | 375                         | 375  |
| CD405515A3A*      | C4055ZNA                | 400                    | 550 | 150 | 12            | 4                 | 4                          | 375                            | 525  | 375                         | 525  |

Il codice si riferisce a prodotti in AISI 304.  
Coperchio cieco, pannello interno a partire da CD151512A3A.  
\* Certificazione IP66 IK08.

The part number refers to products in AISI 304.  
Plain cover, mounting plate starting from CD151512A3A.  
\* Certification IP66 IK08

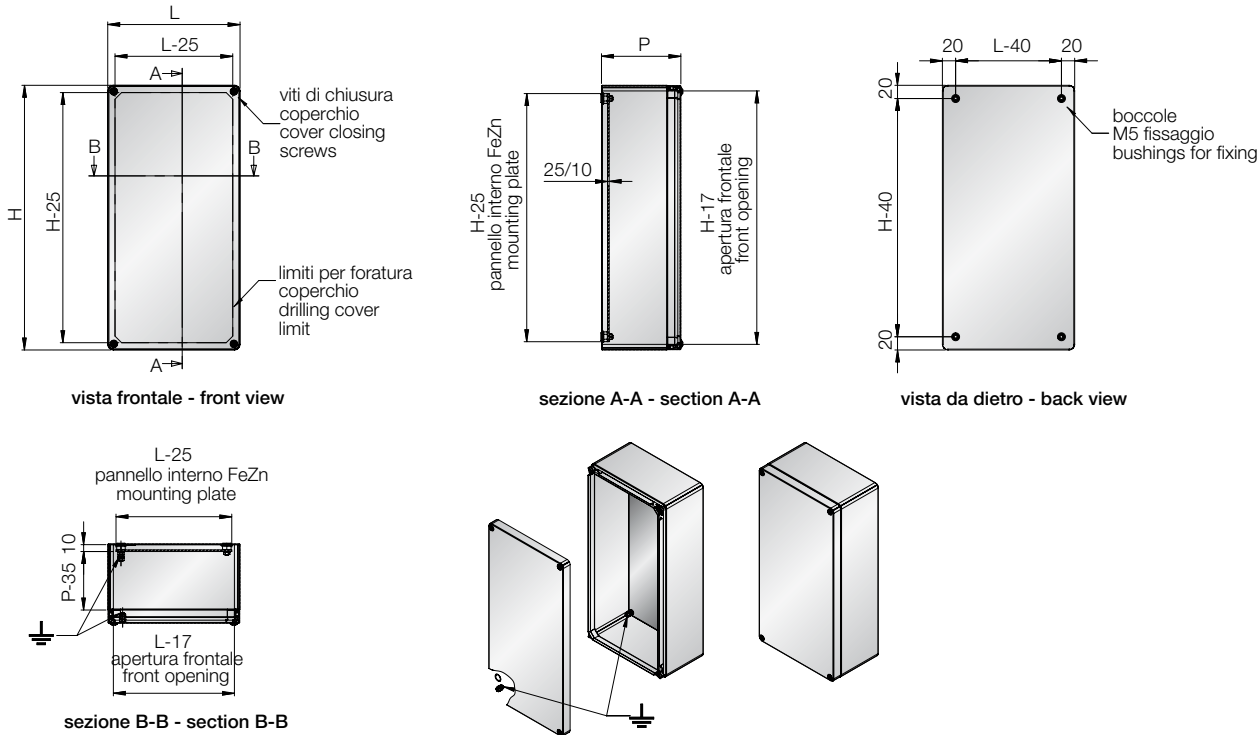

**Stainless steel type**  
A3 = AISI 304 EN 1.4301

**Customisation possibilities**  
Cut-outs, dimensions, thickness:  
upon request, to be specified when  
placing the order  
Stainless steel type:  
A6 = AISI 316 EN 1.4404  
Finishing: SN (Grain 320)

**Certifications and protection category**  
IP66 IK10 EN 60529/2013  
EN 62262/2002  
EN 62208/2012 2006/12/CE

**Upon request**  
ATEX Gruppo II  
NEMA 1, 12, 4, 4x  
Category 3G, 3D  
Standard 50  
Standard 50E



Pulsantira Serie CP

CP Series push button panels

Pulsantiere in acciaio inox AISI 304 EN 1.4301 finitura scotch brite spessore 1,2 mm, particolarmente idonee all'utilizzo in ambienti critici, atmosferici, di igiene, di corrosione e di tossicità. Guarnizioni siliconiche schiumate "Fermasil A-93-1-VP3-Grey" adatte a temperature da -50° C a +180° C. Angoli raggiati R8.


Push button panels, 1.2 mm thick, AISI 304 EN 1.4301 stainless steel with Scotch-Brite finish, particularly suitable for use in critical environments with special atmospheres, or where hygiene is important or there is exposure to corrosion or toxic elements. Provided with Fermasil A-93-1-VP3-Grey foamed silicone gaskets for temperatures from -50°C to +180°C, and R8 rounded corners.



| Codice pulsantiera   | Dimensioni esterne mm  |     |     | Peso netto Kg | Punti di chiusura | Punti fissaggio posteriore | Interasse fissaggi posteriori mm |      | Numero fori Ø 22,5 mm     | Interasse fori Ø 22,5 mm         |      |
|----------------------|------------------------|-----|-----|---------------|-------------------|----------------------------|----------------------------------|------|---------------------------|----------------------------------|------|
|                      | L                      | H   | P   |               |                   |                            | L-40                             | H-40 |                           | L1                               | H1   |
| Push button box cod. | External dimensions mm |     |     | Net weight Kg | Closing points    | Rear fixing points         | Distance between rear fixings mm |      | Number of holes Ø 22,5 mm | Distance between holes Ø 22,5 mm |      |
|                      | L                      | H   | D   |               |                   |                            | L-40                             | H-40 |                           | L1                               | H1   |
| CP090909A3A          | 90                     | 90  | 90  | 0,6           | 4                 | 2                          | -                                | 50   | 1                         | -                                | -    |
| CP091509A3A          | 90                     | 150 | 90  | 0,9           | 4                 | 2                          | -                                | 110  | 2                         | -                                | 60   |
| CP092009A3A          | 90                     | 200 | 90  | 1             | 4                 | 2                          | -                                | 160  | 3                         | -                                | 60   |
| CP092509A3A          | 90                     | 250 | 90  | 1,3           | 4                 | 2                          | -                                | 210  | 4                         | -                                | 55   |
| CP093009A3A          | 90                     | 300 | 90  | 1,5           | 4                 | 2                          | -                                | 260  | 5                         | -                                | 50   |
| CP151512A3A          | 150                    | 150 | 120 | 1,3           | 4                 | 2                          | -                                | 110  | 4                         | 60X2                             | 60X2 |
| CP152012A3A          | 150                    | 200 | 120 | 1,6           | 4                 | 2                          | -                                | 160  | 6                         | 60X2                             | 60X3 |
| CP152512A3A          | 150                    | 250 | 120 | 1,9           | 4                 | 2                          | -                                | 210  | 8                         | 60X2                             | 60X4 |
| CP153012A3A          | 150                    | 300 | 120 | 2,2           | 4                 | 2                          | -                                | 260  | 10                        | 60X2                             | 60X5 |
| CP202012A3A          | 200                    | 200 | 120 | 2             | 4                 | 4                          | 160                              | 160  | 9                         | 60X3                             | 60X3 |
| CP203012A3A          | 200                    | 300 | 120 | 2,7           | 4                 | 4                          | 160                              | 260  | 15                        | 55X3                             | 55X5 |

Il codice si riferisce a prodotti in AISI 304.  
Coperchio forato Ø 22,5 mm come da tabella, senza pannello interno.

The part number refers to products in AISI 304.  
Cover with holes ø22,5 as shown in the chart, without mounting plate.

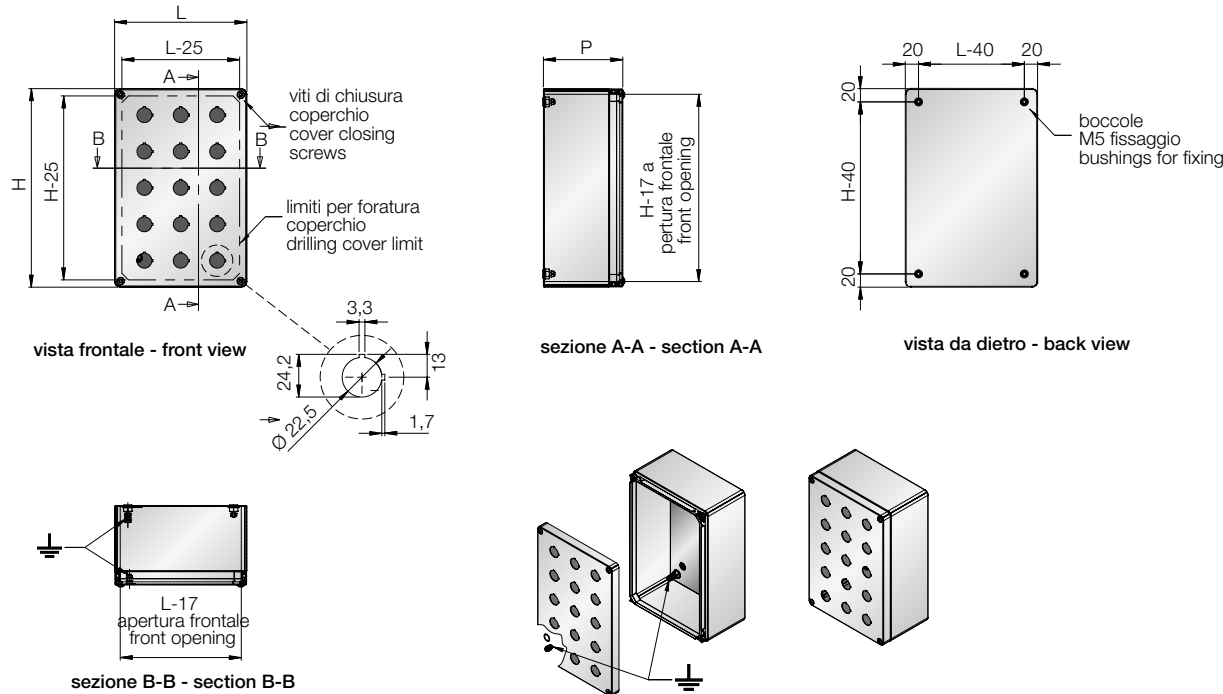

**Stainless steel type**  
A3 = AISI 304 EN 1.4301

**Customisation possibilities**  
Cut-outs, dimensions, thickness:  
upon request, to be specified when  
placing the order  
Stainless steel type:  
A6 = AISI 316 EN 1.4404  
Finishing: SN (Grain 320)

**Certifications and protection category**  
IP66 IK10  
EN 60529/2013  
EN 62262/2002  
EN 62208/2012  
2006/12/CE

**Upon request**  
ATEX Gruppo II  
NEMA 1, 12, 4, 4x  
Category 3G, 3D  
Standard 50  
Standard 50E



Scatole di derivazione Serie CDE  
Pulsantiere Serie CPE  
Accessori

*CDE Series Push-button, terminal boxes*  
*CPE Series Push button panels*  
*Accessories*



Scatole di derivazione  
Serie CDE

CDE Series push-button  
and terminal boxes

Scatole di derivazione in acciaio inox AISI304 EN1.4301 finitura scotch brite spessore 1,2 mm, particolarmente idonee all’utilizzo in ambienti critici, atmosferici, di igiene, di corrosione e di tossicità. Guarnizioni poliuretaniche schiumate “Fermapor K31-A9230-2-VP” adatte a temperature da -40°C a +80°C.


Junction boxes, AISI304 EN1.4301 stainless steel with 1.2 mm thick scotch brite finish, particularly suitable for use in critical, atmospheric, hygiene, corrosion and toxicity environments. Polyurethane foamed gaskets “Fermapor K31-A9230-2-VP” suitable for temperatures from -40 °C to + 80 °C.



| Codice scatola    | Dimensioni esterne mm  |     |     | Peso netto Kg | Punti di chiusura | Punti fissaggio posteriore | Dimens. pannello interno mm |      | Utile foratura coperchio mm |      | Interasse fissaggi posteriori mm |      |
|-------------------|------------------------|-----|-----|---------------|-------------------|----------------------------|-----------------------------|------|-----------------------------|------|----------------------------------|------|
|                   | L                      | H   | P   |               |                   |                            | L-35                        | H-35 | L-40                        | H-40 | L-50                             | H-50 |
| Terminal box cod. | External dimensions mm |     |     | Net weight Kg | Closing points    | Rear fixing points         | Mounting plate dims. mm     |      | Useful lid drilling mm      |      | Rear fixing center distance mm   |      |
|                   | L                      | H   | D   |               |                   |                            | L-35                        | H-35 | L-40                        | H-40 | L-50                             | H-50 |
| CDE090909A3A      | 90                     | 90  | 90  | 0,4           | 4                 | 2                          | -                           | -    | 50                          | 50   | -                                | 40   |
| CDE091509A3A      | 90                     | 150 | 90  | 0,7           | 4                 | 2                          | -                           | -    | 50                          | 110  | -                                | 100  |
| CDE092009A3A      | 90                     | 200 | 90  | 0,8           | 4                 | 2                          | -                           | -    | 50                          | 160  | -                                | 150  |
| CDE093009A3A      | 90                     | 300 | 90  | 1,3           | 4                 | 2                          | -                           | -    | 50                          | 260  | -                                | 250  |
| CDE151512A3A      | 150                    | 150 | 120 | 1,5           | 4                 | 2                          | 115                         | 115  | 110                         | 110  | -                                | 100  |
| CDE152012A3A      | 150                    | 200 | 120 | 1,9           | 4                 | 2                          | 115                         | 165  | 110                         | 160  | -                                | 150  |
| CDE153012A3A      | 150                    | 300 | 120 | 2,8           | 4                 | 2                          | 115                         | 265  | 110                         | 260  | -                                | 250  |
| CDE202012A3A      | 200                    | 200 | 120 | 2,5           | 4                 | 4                          | 165                         | 165  | 160                         | 160  | 150                              | 150  |
| CDE203012A3A      | 200                    | 300 | 120 | 3,6           | 4                 | 4                          | 165                         | 265  | 160                         | 260  | 150                              | 250  |
| CDE204012A3A      | 200                    | 400 | 120 | 4,6           | 4                 | 4                          | 165                         | 365  | 160                         | 360  | 150                              | 350  |
| CDE303012A3A      | 300                    | 300 | 120 | 5             | 4                 | 4                          | 265                         | 265  | 260                         | 260  | 250                              | 250  |
| CDE304015A3A      | 300                    | 400 | 150 | 7             | 4                 | 4                          | 265                         | 365  | 260                         | 360  | 250                              | 350  |
| CDE404015A3A      | 400                    | 400 | 150 | 9             | 4                 | 4                          | 365                         | 365  | 360                         | 360  | 350                              | 350  |

Il codice si riferisce a prodotti in AISI 304.  
Coperchio cieco, pannello interno incluso a partire da CDE 151512A3A.

The code refers to products in AISI 304.  
Blanking cover, included inner panel starting with CDE 151512A3A.

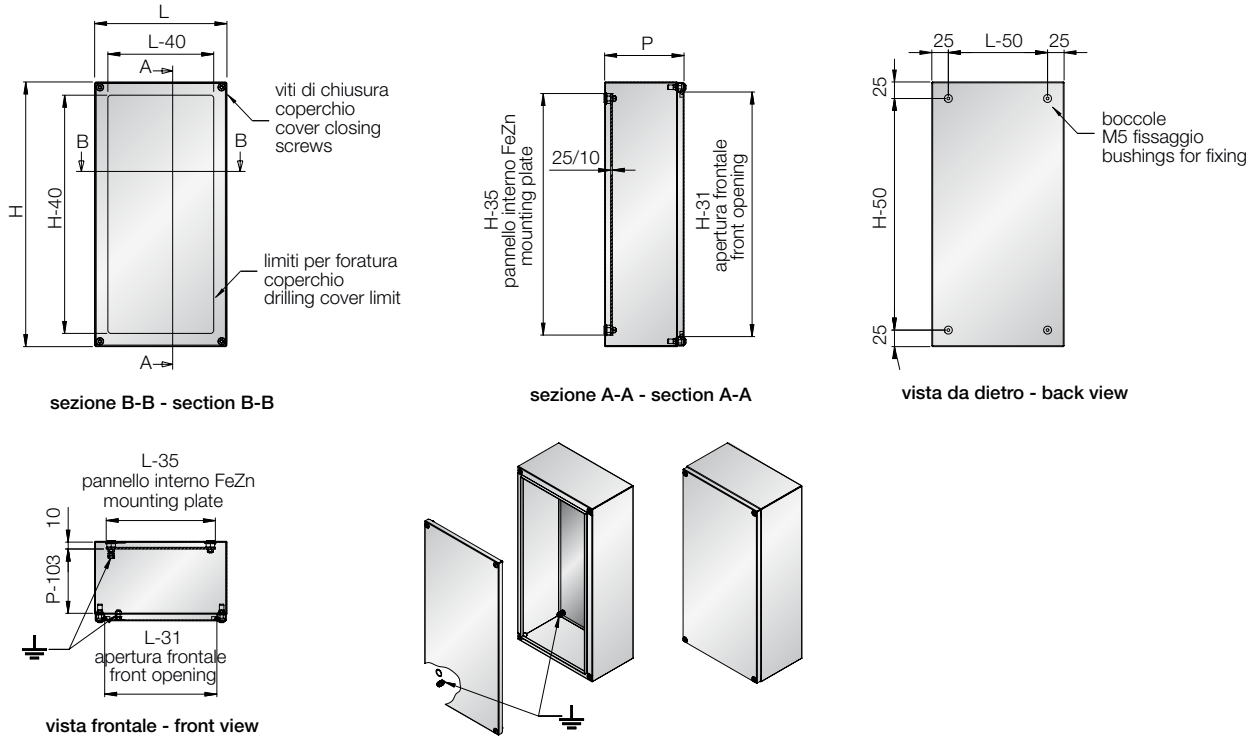

Stainless steel type

A3 = AISI 304 EN 1.4301

Customisation possibilities

Cut-outs, dimensions, thickness:  
upon request, to be specified when  
placing the order Stainless steel type:  
A6 = AISI 316 EN 1.4404  
Finishing: SN (Grain 320)

Certifications  
and protection category

IP66 IK 08      EN 60529/2013  
EN 62262/2002  
EN 62208/2012    2006/12/CE

Upon request

ATEX Gruppo II    Category 3G,3D

CE

Ex

Pulsantira Serie CPE

CPE Series push button panels

Pulsantiere in acciaio inox AISI304 EN1.4301 finitura scotch brite spessore 1,2 mm, particolarmente idonee all'utilizzo in ambienti critici, atmosferici, di igiene, di corrosione e di tossicità. Guarnizioni poliuretatiche schiumate "Fermapor K31-A9230-2-VP" adatte a temperature da -40°C a +80°C.


Push-button panels, AISI304 EN1.4301 stainless steel, 1.2 mm thick scotch brite finish, particularly suitable for use in critical, atmospheric, hygiene, corrosion and toxicity environments. Polyurethane foamed gaskets "Fermapor K31-A9230-2-VP" suitable for temperatures from -40 °C to + 80 °C.



| Codice pulsantiera   | Dimensioni esterne mm  |     |     | Peso netto Kg | Punti di chiusura | Punti fissaggio posteriore | Interasse fissaggi posteriori mm |      | Numero fori Ø 22,5 mm     | Interasse fori Ø 22,5 mm         |        |
|----------------------|------------------------|-----|-----|---------------|-------------------|----------------------------|----------------------------------|------|---------------------------|----------------------------------|--------|
|                      | L                      | H   | P   |               |                   |                            | L-50                             | H-50 |                           | L1                               | H1     |
| Push button box cod. | External dimensions mm |     |     | Net weight Kg | Closing points    | Rear fixing points         | Distance between rear fixings mm |      | Number of holes Ø 22,5 mm | Distance between holes Ø 22,5 mm |        |
|                      | L                      | H   | D   |               |                   |                            | L-50                             | H-50 |                           | L1                               | H1     |
| CPE090909A3A         | 90                     | 90  | 90  | 0,4           | 4                 | 2                          | -                                | 40   | 1                         | -                                | -      |
| CPE091509A3A         | 90                     | 150 | 90  | 0,7           | 4                 | 2                          | -                                | 100  | 2                         | -                                | 55X2   |
| CPE092009A3A         | 90                     | 200 | 90  | 0,8           | 4                 | 2                          | -                                | 150  | 3                         | -                                | 55X3   |
| CPE092509A3A         | 90                     | 250 | 90  | 1,1           | 4                 | 2                          | -                                | 200  | 4                         | -                                | 52,5X4 |
| CPE093009A3A         | 90                     | 300 | 90  | 1,3           | 4                 | 2                          | -                                | 250  | 5                         | -                                | 52,5X5 |
| CPE151512A3A         | 150                    | 150 | 120 | 1,1           | 4                 | 2                          | -                                | 100  | 4                         | 55x2                             | 55x2   |
| CPE152012A3A         | 150                    | 200 | 120 | 1,4           | 4                 | 2                          | -                                | 150  | 6                         | 55x2                             | 55x3   |
| CPE152512A3A         | 150                    | 250 | 120 | 1,7           | 4                 | 2                          | -                                | 200  | 8                         | 55x2                             | 52,5x4 |
| CPE153012A3A         | 150                    | 300 | 120 | 2             | 4                 | 2                          | -                                | 250  | 10                        | 55X2                             | 52,5x5 |
| CPE202012A3A         | 200                    | 200 | 120 | 1,8           | 4                 | 4                          | 150                              | 150  | 9                         | 55X3                             | 55x3   |
| CPE203012A3A         | 200                    | 300 | 120 | 2,5           | 4                 | 4                          | 150                              | 250  | 15                        | 55X3                             | 52,5X5 |

Il codice si riferisce a prodotti in AISI 304.  
Coperchio forato Ø 22,5 mm come da tabella, senza pannello interno.

The code refers to products in AISI 304.  
Perforated lid Ø 22.5 mm as per table, without internal panel.

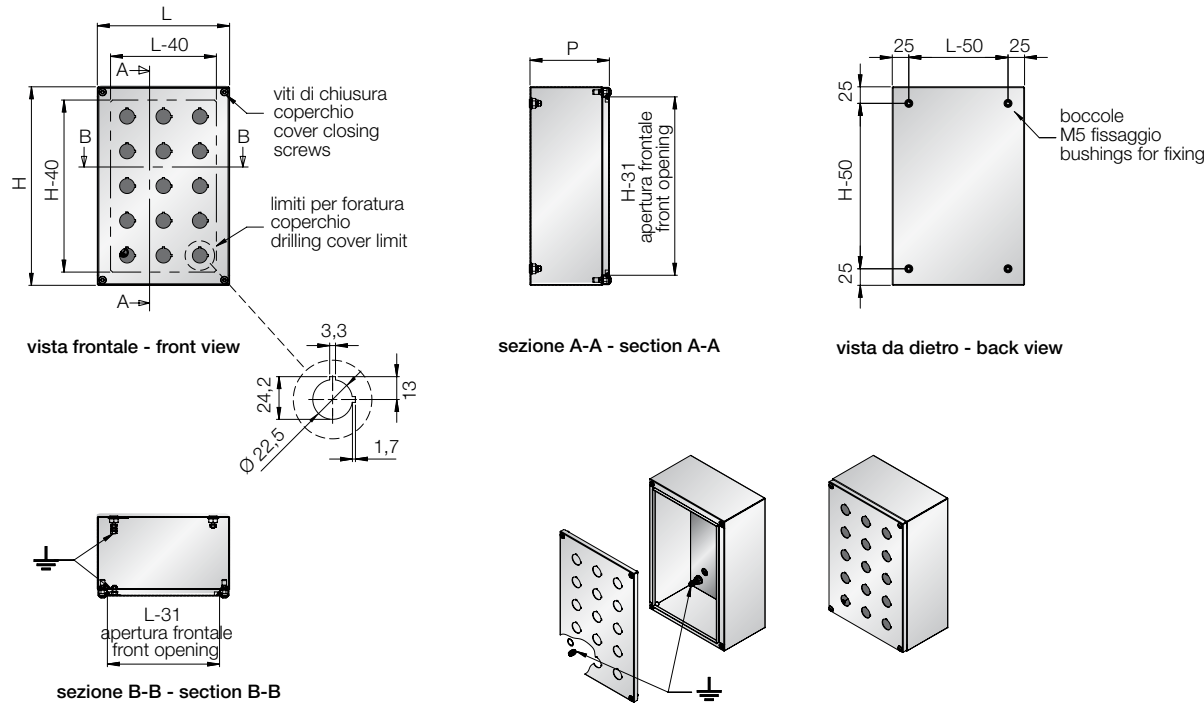

|                                                        |                                                                                                                                                                                                                    |                                                                                                                              |                                                         |                                                                                                                                                                                |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Stainless steel type</b><br>A3 = AISI 304 EN 1.4301 | <b>Customisation possibilities</b><br>Cut-outs, dimensions, thickness:<br>upon request, to be specified when<br>placing the order<br>Stainless steel type:<br>A6 = AISI 316 EN 1.4404<br>Finishing: SN (Grain 320) | <b>Certifications and protection category</b><br>IP66 IK 08<br>EN 60529/2013<br>EN 62262/2002<br>EN 62208/2012<br>2006/12/CE | <b>Upon request</b><br>ATEX Gruppo II<br>Category 3G,3D | <br> |
|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Accessori per scatole di derivazione e pulsantiere

Accessories for junction boxes and push button panels

Piedistalli

Vengono utilizzati come supporto di base per scatole di derivazione e pulsantiere e sono realizzati in acciaio inox AISI 304 (EN 1.4301). Predisposti al passaggio di cavi. A richiesta disponibili in acciaio inox AISI 316 (EN1.4404).



Pedestals

Used as support bases for junction boxes and push button panels and made in AISI 304 stainless steel (EN 1.4301). Prepared to take cables. Available on demand in AISI 316 stainless steel (EN1.4404).

| Codice piedistallo | Dimensioni piedistallo mm |      |     | Interasse fori Ø15 fissaggio a pavimento mm |      |
|--------------------|---------------------------|------|-----|---------------------------------------------|------|
|                    | L                         | H    | P   |                                             |      |
| Pedestal cod.      | Pedestal dimensions mm    |      |     | Distance between holes for floor fixing mm  |      |
|                    | L                         | H    | D   | L-40                                        | P-40 |
| PDC4010030A3A      | 400                       | 1000 | 300 | 360                                         | 260  |

Supporto guida DIN

Staffa preforata Ø 4,6 mm adatta al fissaggio della guida DIN, in ferro zincato.



DIN rail bracket

Galvanised iron Ø 4.6mm pre-drilled bracket for securing a DIN rail.

| Codice supporto guida DIN | Dimensioni supporto guida DIN mm   |     |    | Interasse di fissaggio mm |
|---------------------------|------------------------------------|-----|----|---------------------------|
|                           | L                                  | H   | P  |                           |
| Support for DIN rail cod. | Dimensions for DIN rail support mm |     |    | Fixing distance mm        |
|                           | L                                  | H   | D  |                           |
| SDINC020ZNA               | 30                                 | 175 | 10 | 160                       |
| SDINC025ZNA               | 30                                 | 225 | 10 | 210                       |
| SDINC030ZNA               | 30                                 | 275 | 10 | 260                       |
| SDINC040ZNA               | 30                                 | 375 | 10 | 360                       |
| SDINC055ZNA               | 30                                 | 525 | 10 | 510                       |

Supporto a parete

Kit formato da due/quattro staffe che vengono avvitate alle boccole sul retro della scatola, in versione piana o piegata che distanziano di 10 mm la scatola dalla parete di fissaggio. A richiesta disponibili in acciaio inox AISI 316 (EN1.4404).




Wall brackets


Kit comprising two/four brackets to screw onto the bushes on the back of the box. Can be flat or bent to distance the box from the wall by 10mm. Available on demand in AISI 316 stainless steel (EN1.4404).

| Codice Kit                                       | Kit       | Dimensione mm |    |    |
|--------------------------------------------------|-----------|---------------|----|----|
|                                                  |           | L             | H  | P  |
| Kit cod.                                         | Kit       | Dimensions mm |    |    |
|                                                  |           | L             | H  | P  |
| Supporto a parete piana - Flat wall brackets     |           |               |    |    |
| K2SPPNCA3A                                       | Kit 2 pz. | 30            | 58 | 8  |
| K4SPPNCA3A                                       | Kit 4 pz. | 30            | 58 | 8  |
| Supporto a parete piegata - Raised wall brackets |           |               |    |    |
| K2SPPGCA3A                                       | Kit 2 pz. | 30            | 58 | 17 |
| K4SPPGCA3A                                       | Kit 4 pz. | 30            | 58 | 17 |

Staffa a muro piana - Flat wall bracket

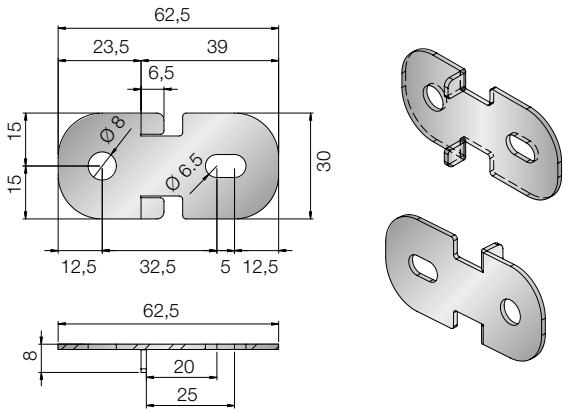

Staffa a muro piegata - Wall bracket folded

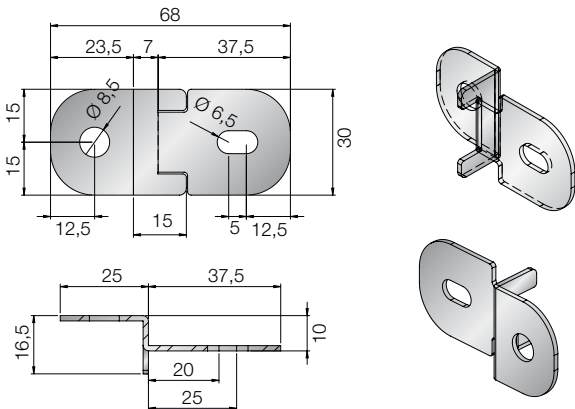

Flangia ingresso cavi

Piastra realizzata in acciaio inox AISI 304 (EN 1.4301), completa di guarnizione in silicone e viteria. Utilizzata per applicazioni con passacavi. Accessorio da definire in fase di ordine/offerta. A richiesta disponibili in acciaio inox AISI 316 (EN1.4404).



Cable Gland Plate

AISI 304 stainless steel (EN 1.4301) plate, complete with silicone gasket and screws. Used for applications requiring a cable gland plate. Accessory to be defined on ordering/quoting. Available on demand in AISI 316 stainless steel (EN1.4404).

Casse anta in lexan

Serie QL

QL Series

Lexan door enclosures

Casse in acciaio inox AISI 304 EN 1.4301 ad anta in lexan con finitura scotch brite e spessori variabili da 1,2 mm a 1,5 mm, particolarmente idonee all'utilizzo in ambienti critici, atmosferici, di igiene, di corrosione e di tossicità. La porta è reversibile con apertura di 180°. Cerniere a scomparsa in microfusione di acciaio AISI 316. Chiusure con chiave a doppia aletta. Guarnizioni siliconiche schiumate "Fermasil A-93-1-VP3-Grey" adatte a temperature da -50° C a +180° C. Angoli raggiati R8.


AISI 304 EN 1.4301 stainless steel enclosures with Lexan door. Scotch-Brite finish and thicknesses from 1.2 mm to 1.5 mm, particularly suitable for use in critical environments with special atmospheres, or where hygiene is important or there is exposure to corrosion or toxic elements. The doors is reversible and opens to 180°. Concealed precision cast AISI 316 steel hinges. Lock with double blade key. Provided with Fermasil A-93-1-VP3-Grey foamed silicone gaskets for temperatures from -50° C to +180° C, and R8 rounded corners.



| Codice cassa   | Codice pannello interno    | Dimensioni esterne mm  |      |     | Peso netto Kg | Numero cerniere  | Punti di fissaggio posteriore | Dim. pannello interno mm | Luce Lexan porta mm       |                    | Interasse fissaggi posteriori mm |       |
|----------------|----------------------------|------------------------|------|-----|---------------|------------------|-------------------------------|--------------------------|---------------------------|--------------------|----------------------------------|-------|
|                |                            | L                      | H    | P   |               |                  |                               | L-55 H-30                | L-120* H-120*             |                    | L-70 H-70                        |       |
| Enclosure cod. | Mounting plate part number | External dimensions mm |      |     | Net weight Kg | Number of hinges | Closing points                | Rear fixing points       | Mounting plate dimens. mm | Door drill size mm | Distance between rear fixings mm |       |
|                |                            | L                      | H    | D   |               |                  |                               |                          | L-55 H-30                 | L-120* H-120*      | L-70                             | H-70  |
| QL203015A3A    | Q2030ZNA                   | 200                    | 300  | 150 | 4,3           | 2                | 2                             | 4                        | 145 270                   | 80 180             | 130                              | 230   |
| QL303021A3A    | Q3030ZNA                   | 300                    | 300  | 210 | 6,5           | 2                | 2                             | 4                        | 245 270                   | 180 180            | 230                              | 230   |
| QL304021A3A    | Q3040ZNA                   | 300                    | 400  | 210 | 8,5           | 2                | 2                             | 4                        | 245 370                   | 180 280            | 230                              | 330   |
| QL304521A3A    | Q3045ZNA                   | 300                    | 450  | 210 | 9             | 2                | 2                             | 4                        | 245 420                   | 180 330            | 230                              | 380   |
| QL404021A3A    | Q4040ZNA                   | 400                    | 400  | 210 | 10,5          | 2                | 2                             | 4                        | 345 370                   | 280 280            | 330                              | 330   |
| QL405021A3A    | Q4050ZNA                   | 400                    | 500  | 210 | 12,5          | 2                | 2                             | 4                        | 345 470                   | 280 380            | 330                              | 430   |
| QL405025A3A    | Q4050ZNA                   | 400                    | 500  | 250 | 13            | 2                | 2                             | 4                        | 345 470                   | 280 380            | 330                              | 430   |
| QL406021A3A    | Q4060ZNA                   | 400                    | 600  | 210 | 14,5          | 2                | 2                             | 4                        | 345 570                   | 280 480            | 330                              | 530   |
| QL406025A3A    | Q4060ZNA                   | 400                    | 600  | 250 | 15,5          | 2                | 2                             | 4                        | 345 570                   | 280 480            | 330                              | 530   |
| QL406030A3A    | Q4060ZNA                   | 400                    | 600  | 300 | 18,5          | 2                | 2                             | 4                        | 345 570                   | 280 480            | 330                              | 530   |
| QL454521A3A    | Q4545ZNA                   | 450                    | 450  | 210 | 12,5          | 2                | 2                             | 4                        | 395 420                   | 330 330            | 380                              | 380   |
| QL456025A3A    | Q4560ZNA                   | 450                    | 600  | 250 | 17            | 2                | 2                             | 4                        | 395 570                   | 330 480            | 380                              | 530   |
| QL505021A3A    | Q5050ZNA                   | 500                    | 500  | 210 | 14,5          | 2                | 2                             | 4                        | 445 470                   | 380 380            | 430                              | 430   |
| QL505025A3A    | Q5050ZNA                   | 500                    | 500  | 250 | 15,5          | 2                | 2                             | 4                        | 445 470                   | 380 380            | 430                              | 430   |
| QL507025A3A    | Q5070ZNA                   | 500                    | 700  | 250 | 21,5          | 2                | 2                             | 4                        | 445 670                   | 380 580            | 430                              | 630   |
| QL604021A3A    | Q6040ZNA                   | 600                    | 400  | 210 | 14,5          | 2                | 2                             | 4                        | 545 370                   | 480 280            | 530                              | 330   |
| QL604525A3A    | Q6045ZNA                   | 600                    | 450  | 250 | 17            | 2                | 2                             | 4                        | 545 420                   | 480 330            | 530                              | 380   |
| QL606021A3A    | Q6060ZNA                   | 600                    | 600  | 210 | 21            | 2                | 2                             | 4                        | 545 570                   | 480 480            | 530                              | 530   |
| Q 606025A3A    | Q6060ZNA                   | 600                    | 600  | 250 | 22            | 2                | 2                             | 4                        | 545 570                   | 480 480            | 530                              | 530   |
| QL606030A3A    | Q6060ZNA                   | 600                    | 600  | 300 | 26            | 2                | 2                             | 4                        | 545 570                   | 480 480            | 530                              | 530   |
| QL606040A3A    | Q6060ZNA                   | 600                    | 600  | 400 | 29            | 2                | 2                             | 4                        | 545 570                   | 480 480            | 530                              | 530   |
| QL607525A3A    | Q6075ZNA                   | 600                    | 750  | 250 | 29            | 2                | 2                             | 4                        | 545 720                   | 480 630            | 530                              | 680   |
| QL608025A3A    | Q6080ZNA                   | 600                    | 800  | 250 | 31            | 2                | 2                             | 4                        | 545 770                   | 480 680            | 530                              | 730   |
| QL608030A3A    | Q6080ZNA                   | 600                    | 800  | 300 | 32,5          | 2                | 2                             | 4                        | 545 770                   | 480 680            | 530                              | 730   |
| QL608040A3A    | Q6080ZNA                   | 600                    | 800  | 400 | 36            | 2                | 2                             | 4                        | 545 770                   | 480 680            | 530                              | 730   |
| QL609030A3A    | Q6090ZNA                   | 600                    | 900  | 300 | 38,5          | 3                | 3                             | 4                        | 545 870                   | 415* 755*          | 530                              | 830   |
| QL6010030A3A   | Q60100ZNA                  | 600                    | 1000 | 300 | 42,5          | 3                | 3                             | 6                        | 545 970                   | 415* 855*          | 530                              | 465x2 |
| QL6012030A3A   | Q60120ZNA                  | 600                    | 1200 | 300 | 50            | 3                | 3                             | 6                        | 545 1170                  | 415* 1055*         | 530                              | 565x2 |
| QL806030A3A    | Q8060ZNA                   | 800                    | 600  | 300 | 32,5          | 2                | 2                             | 4                        | 745 570                   | 680 480            | 730                              | 530   |
| QL808030A3A    | Q8080ZNA                   | 800                    | 800  | 300 | 41            | 2                | 2                             | 4                        | 745 770                   | 680 680            | 730                              | 730   |
| QL8010030A3A   | Q80100ZNA                  | 800                    | 1000 | 300 | 53            | 3                | 3                             | 6                        | 745 970                   | 615* 855*          | 730                              | 465x2 |
| QL8012030A3A   | Q80120ZNA                  | 800                    | 1200 | 300 | 62            | 3                | 3                             | 6                        | 745 1170                  | 615* 1055*         | 730                              | 565x2 |
| QL8012040A3A   | Q80120ZNA                  | 800                    | 1200 | 400 | 67            | 3                | 3                             | 6                        | 745 1170                  | 615* 1055*         | 730                              | 565x2 |

\* Sulle casse con terzo box le misure variano come da disegno  
Il codice si riferisce a prodotti in AISI 304.

\* The part number refers to products in AISI 304.  
The code refers to products in AISI 304.


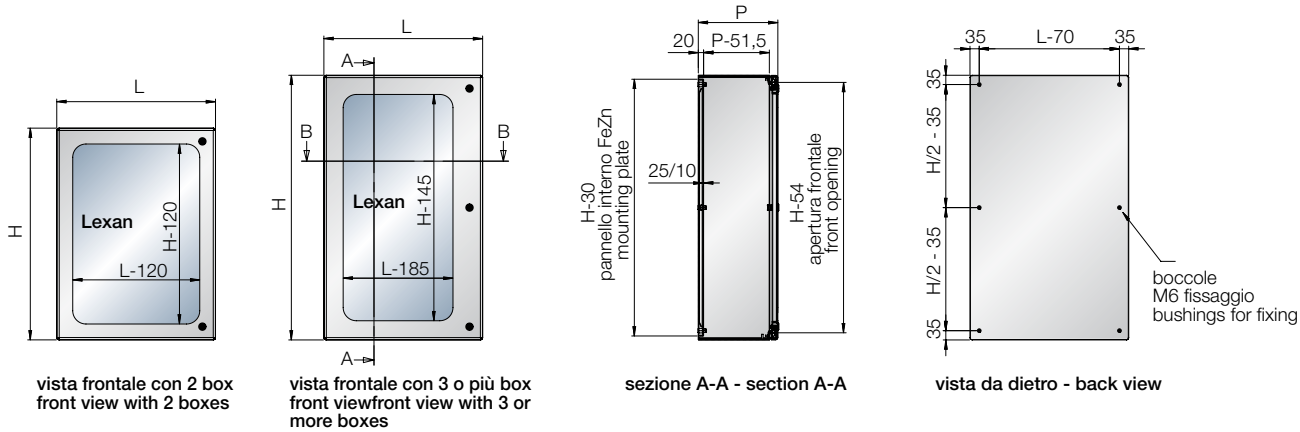


**Stainless steel type**  
A3 = AISI 304 EN 1.4301

**Customisation possibilities**  
Cut-outs, dimensions, thickness:  
upon request, to be specified when  
placing the order Stainless steel type:  
A6 = AISI 316 EN 1.4404  
Finishing: SN (Grain 320)

**Certifications and protection category**  
IP66 IK10 EN 60529/2013  
EN 62262/2002 EN 62208/2012  
2006/12/CE

**Upon request**  
ATEX Gruppo II with glass 3+3  
Category 3G,3D  
NEMA 1,12,4,4x Standard 508A

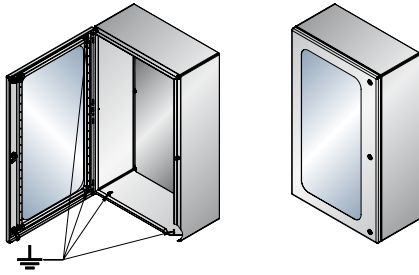

**Artinox SpA**  
Via F. Fabbri, 39  
z.i. Campidui  
31015 Conegliano (TV)  
+39 0438 4531  
[enclosures@artinox.com](mailto:enclosures@artinox.com)  
[artinox-enclosures.com](http://artinox-enclosures.com)